


CIMA's swivel trailers are stable and nimble, providing an excellent answer for hilly terrains and tight areas. The fan and spray head mount on your tractor's 3 point hitch with only the tank weight riding on its trailer. The sprayer's wheels track your tractors path, making it possible to travel out of one row and into the next without backing up.



Custom distribution heads available for every application, see all options at BDiMachinery.com

MODEL	S50	S50	S50 (Narrow)	S50	S55
Tank (Gallons)	200	300	300	400	400
Electric Valves	Standard	Standard	Standard	Standard	Standard
Min PTO HP	55	55	55	55	70
Fan Size	20"	20"	20"	20"	Dual 22"
Air Volume (CFM)	4444	4444	4444	4444	9123
Air Speed (MPH)	180-185	180-185	180-185	180-185	180-185
Pump (GPM)	37	37	37	74	74
RPMs	4000	4000	4000	4000	3900
Length	120"	124"	120"	143"	146"
Width	42"- 53"	55"-65"	44"-55"	64"-85"	64"-83"
Height	67"	68"	67"	67"	70"
Weight (lbs)	1124	1191	1179	1473	1506


The CIMA Advantage



High Volume Sprayer



Low Volume CIMA Sprayer

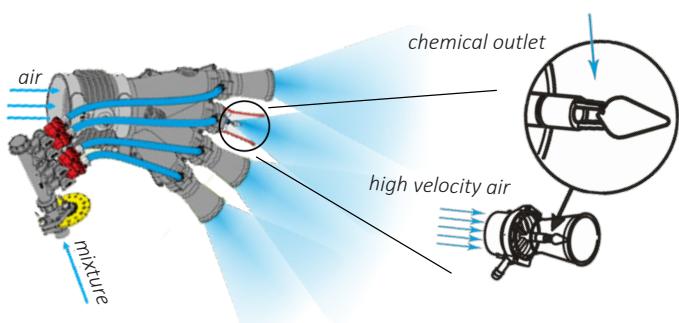

CIMA's Low Volume sprayers create droplets of $100-150\mu$, while standard high pressure sprayers commonly make droplets of $250-400\mu$. Breaking down the liquid into smaller droplets allows for better coverage, more even distribution, and allows appropriate application without soaking your crop. The low volume system coats all surfaces of the system with air speeds around 170-200 MPH, achieving maximum coverage and a cleaner crop.