


CIMA manufactures several multi-row delivery heads to fit your specific needs. Match up your specific growing conditions with the information below to find the perfect sprayer for your vineyard.



HEAD	Configuration	Sprayer	Row Width	Height	Rows Covered
TS5.12M.A50MI3	12 Hands at 2 Diffusers	T50 (200-300 Gal.)	6'-7.2'	7.5'	2 Full
TS5.12M.J50MI3	12 Hands at 2 Diffusers	T50 (200-300 Gal.)	5'-6.2'	7.5'	2 Full
TS5.18M.A50MI3	18 Hands at 2 Diffusers	T50 (200-300 Gal.)	6'-7.2'	7.5'	2 Full 2 Half
TS5.18M.J50MI3	18 Hands at 2 Diffusers	T50 (200-300 Gal.)	5'-6.2'	7.5'	2 Full 2 Half
TS5.4M.B55DI3	4 Hands at 4 Diffusers	T50 (200-300 Gal.)	7.5'-10'	8'	2 Full
TS5.4M.B55MI3	4 Hands at 4 Diffusers	T55 (400-500 Gal.)	7.5'-10'	8'	2 Full
TS5.4M4C.B55DI3	4 Hands at 4 Diffusers + 4 Cannons	T55 (400-500 Gal.)	7.5'-10'	8'	2 Full
TS5.4M4C.B55MI3	4 Hands at 4 Diffusers + 4 Cannons	T55 (300 Gal.)	7.5'-10'	8'	2 Full
TS5.4M4C.C55DI3	4 Hands at 4 Diffusers + 4 Cannons	T55 (400-500 Gal.)	9.5'-13.7'	8'	2 Full
TS5.4M4M.A50MI3	4 Hands at 3 Diff. + 4 Hands at 2 Diff.	T50 (200-300 Gal.)	6'-7.2'	8'	2 Full
TS5.4M4M.J50MI3	4 Hands at 3 Diff. + 4 Hands at 2 Diff.	T50 (200-300 Gal.)	5'-6.2'	8'	2 Full
TS5.6M.B55DI3	6 Hands at 4 Diffusers	T50 (400 Gal.)	7.5'-10'	8'	2 Full 2 Half
TS5.6M.B55MI3	6 Hands at 4 Diffusers	T50 (300 Gal.)	7.5'-10'	8'	2 Full 2 Half
TS5.6M.C55DI3	6 Hands at 4 Diffusers	T55 (400-500 Gal.)	9.5'-13.7'	8'	2 Full 2 Half
TS5.6M6C.B55MI3	6 Hands at 4 Diffusers + 6 Cannons	T55 (300 Gal.)	9.5'-13.7'	8'	2 Full 2 Half
TS5.6M6C.C55DI3	6 Hands at 4 Diffusers + 6 Cannons	T55 (400-500 Gal.)	9.5'-13.7'	8'	2 Full 2 Half
TS5.6M6M.A50MI3	6 Hands at 3 Diff. + 6 Hands at 2 Diff.	T50 (200-300 Gal.)	6'-7.2'	7.5'	2 Full 2 Half
TS5.6M6M.J50MI3	6 Hands at 3 Diff. + 6 Hands at 2 Diff.	T50 (200)	5'-6.2'	7.5'	2 Full 2 Half

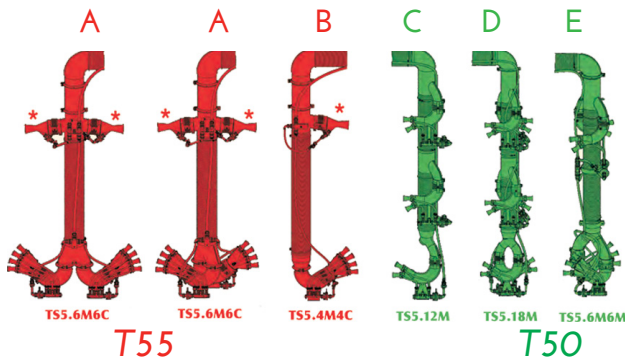

A (1HIC) 2 Sides *

B (1HIC) 1 Side *



Optional 4 nozzle hand can replace upper cannon.

C (3N) 1 Side


D (3N) 2 Sides

E (1HIN) 2 Sides

N = Nozzle (2 Fingers)

H = Hand (4 Fingers)

C = Cannon



Five way electro-hydraulic controls come standard with all models.

