



CIMA's trailer sprayers have spray heads available for virtually any crop. Low volume atomization delivery system will treat more canopy with 2/3 less water than conventional high-pressure sprayers. Low pressure also means low maintenance! All models come standard with Electric Valve controls.



Custom distribution heads available for every application, see all options at BDIMachinery.com

MODEL	T45	T45*	T50*	T50	T55	T55
Tank (Gallons)	200	300	300	400	400	525
Min PTO HP	35	40	55	60	85	75
Fan Size	18"	18"	20"	20"	Dual 22"	Dual 22"
Air Volume (CFM)	3178	3178	4444	4444	9123	9123
Air Speed (MPH)	180-185	180-185	180-185	180-185	180-185	180-185
Pump (GPM)	37	37	37	74	74	74
RPMs	4500	4500	4000	4000	3900	3900
Length	118"-135"	129"-146"	133"-150"	156"-176"	165"-182"	165"-182"
Height	52"	54"	61"-65"	59"-64"	57"-62"	68"-73"
Weight (lbs)	837	914	1060	1349	1490	1554
Standard Width	43"-53"	54"-71"	55"-71"	66"-82"	66"-83"	67"-85"
Narrow Width*	N/A	44"-55"	44"-55"	N/A	N/A	N/A


The CIMA Advantage



High Volume Sprayer



Low Volume CIMA Sprayer

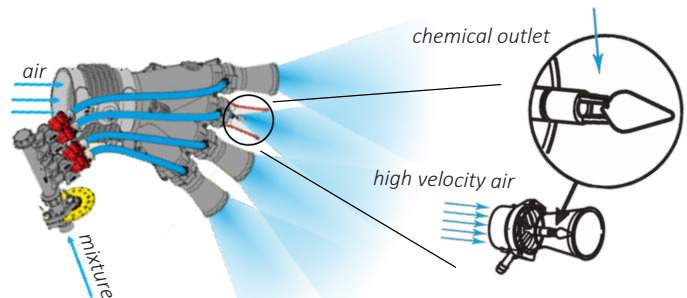

CIMA's Low Volume sprayers create droplets of 100-150 μ , while standard high pressure sprayers commonly make droplets of 250-400 μ . Breaking down the liquid into smaller droplets allows for better coverage, more even distribution, and allows appropriate application without soaking your crop. The low volume system coats all surfaces of the system with air speeds around 170-200 MPH, achieving maximum coverage and a cleaner crop.